


## QUICK SETUP GUIDE

- 1 x A: Brass tap
- 1 x B: Brass reducer
- 1 x C: Pipe connector
- 1 x D: Rainwater pipe
- 1 x E: Submersible pump
- 1 x F: Wall mountable hose/tap connector

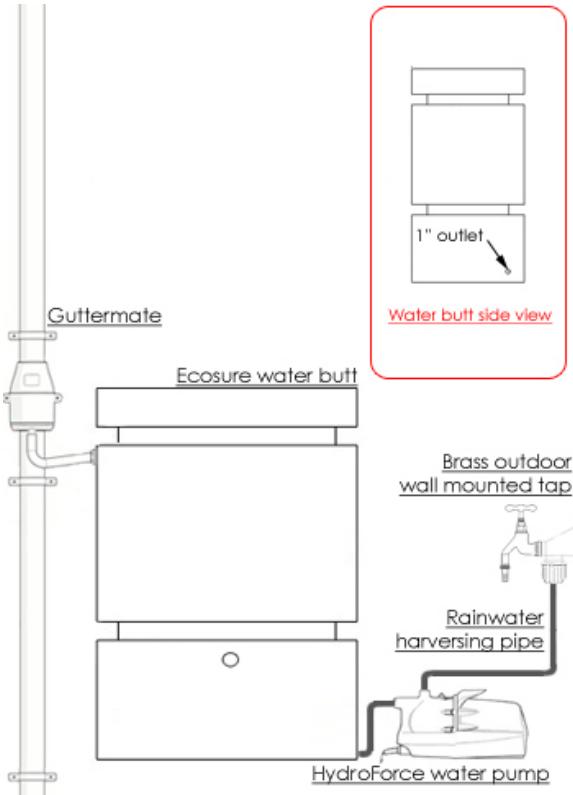

## CONTACT

### Address

**Ecosure**  
Etills Limited  
Unit 1  
Whiting Way  
Melbourn  
Hertfordshire  
SG8 6NA

### Phone & Fax

Office +44 1763 261781  
Fax +44 1763 268409

### Online

Email sales@ecosure.co.uk  
Website www.ecosure.co.uk

*Live chat available*



# EasyConnect Rainwater Harvesting System

# User Guide



## THANK YOU

Thank you for buying the 525 Litre EasyConnect Rainwater Harvesting System. We hope you will be completely satisfied with your purchase. This industrial strength product is guaranteed frost-proof and is made from UV stabilised polymer.

## IMPORTANT SAFETY INSTRUCTIONS

- The tank must be installed on a firm, smooth base built in accordance with good building standards and engineering principles. This base could, for example, be made from concrete or steel. The base should be adequate for the weight of the tank and large enough to extend to the sides of the tank. The tank must not be sited tight against a wall or similar structure.
- If a large water tank is inadequately supported, the tank itself can be weakened, leading to eventual failure and the escape of the stored liquid. During the life of an installation of a large water storage tank, the base will need to provide continual structural support, even though ground conditions may alter from season to season and year to year.

## TANK DETAILS

Height	1100mm
Length	840mm
Width	650mm
Front Outlet	1 x 3/4 BSP
Side Outlets	1" BSP
Weight	26kg
Access	Fully Removable Lid
Capacity	525 litres / 115 gallons
Material	MDPE

